


Model	Airflows (@100pa)	Heat Recovery Efficiency	Supply Filter	Extract Filter	Heat Exchanger	Motor Type	Power	Air Duct Diameter	Product Size
W200-ERV-B-Z-EC	200m³/h	86% ~ 95%	<b>G4</b> (Standard) <b>F8</b> (Optional)	G4	Counter-flow	EC	76W, 0.6A	Ф <b>150mm</b>	690*458*850mm
W250-ERV-B-Z-EC	250m³/h	83% ~ 95%	<b>G4</b> (Standard) <b>F8</b> (Optional)	G4	Counter-flow	EC	113W, 0.8A	Ф <b>150mm</b>	690*458*850mm
W300-ERV-B-Z-EC	300m³/h	81% ~ 95%	<b>G4</b> (Standard) <b>F8</b> (Optional)	G4	Counter-flow	EC	165W, 1A	Ф <b>150mm</b>	690*458*850mm
W350-ERV-B-Z-EC	350m³/h	78% ~ 95%	<b>G4</b> (Standard) <b>F8</b> (Optional)	G4	Counter-flow	EC	196W, 1.2A	Ф <b>150mm</b>	690*458*850mm

## LEFT & RIGHT Panel in 1 Unit

Easy Maintaining

Counter-flow Heat Exchanger

HIGH EFFICIENCY

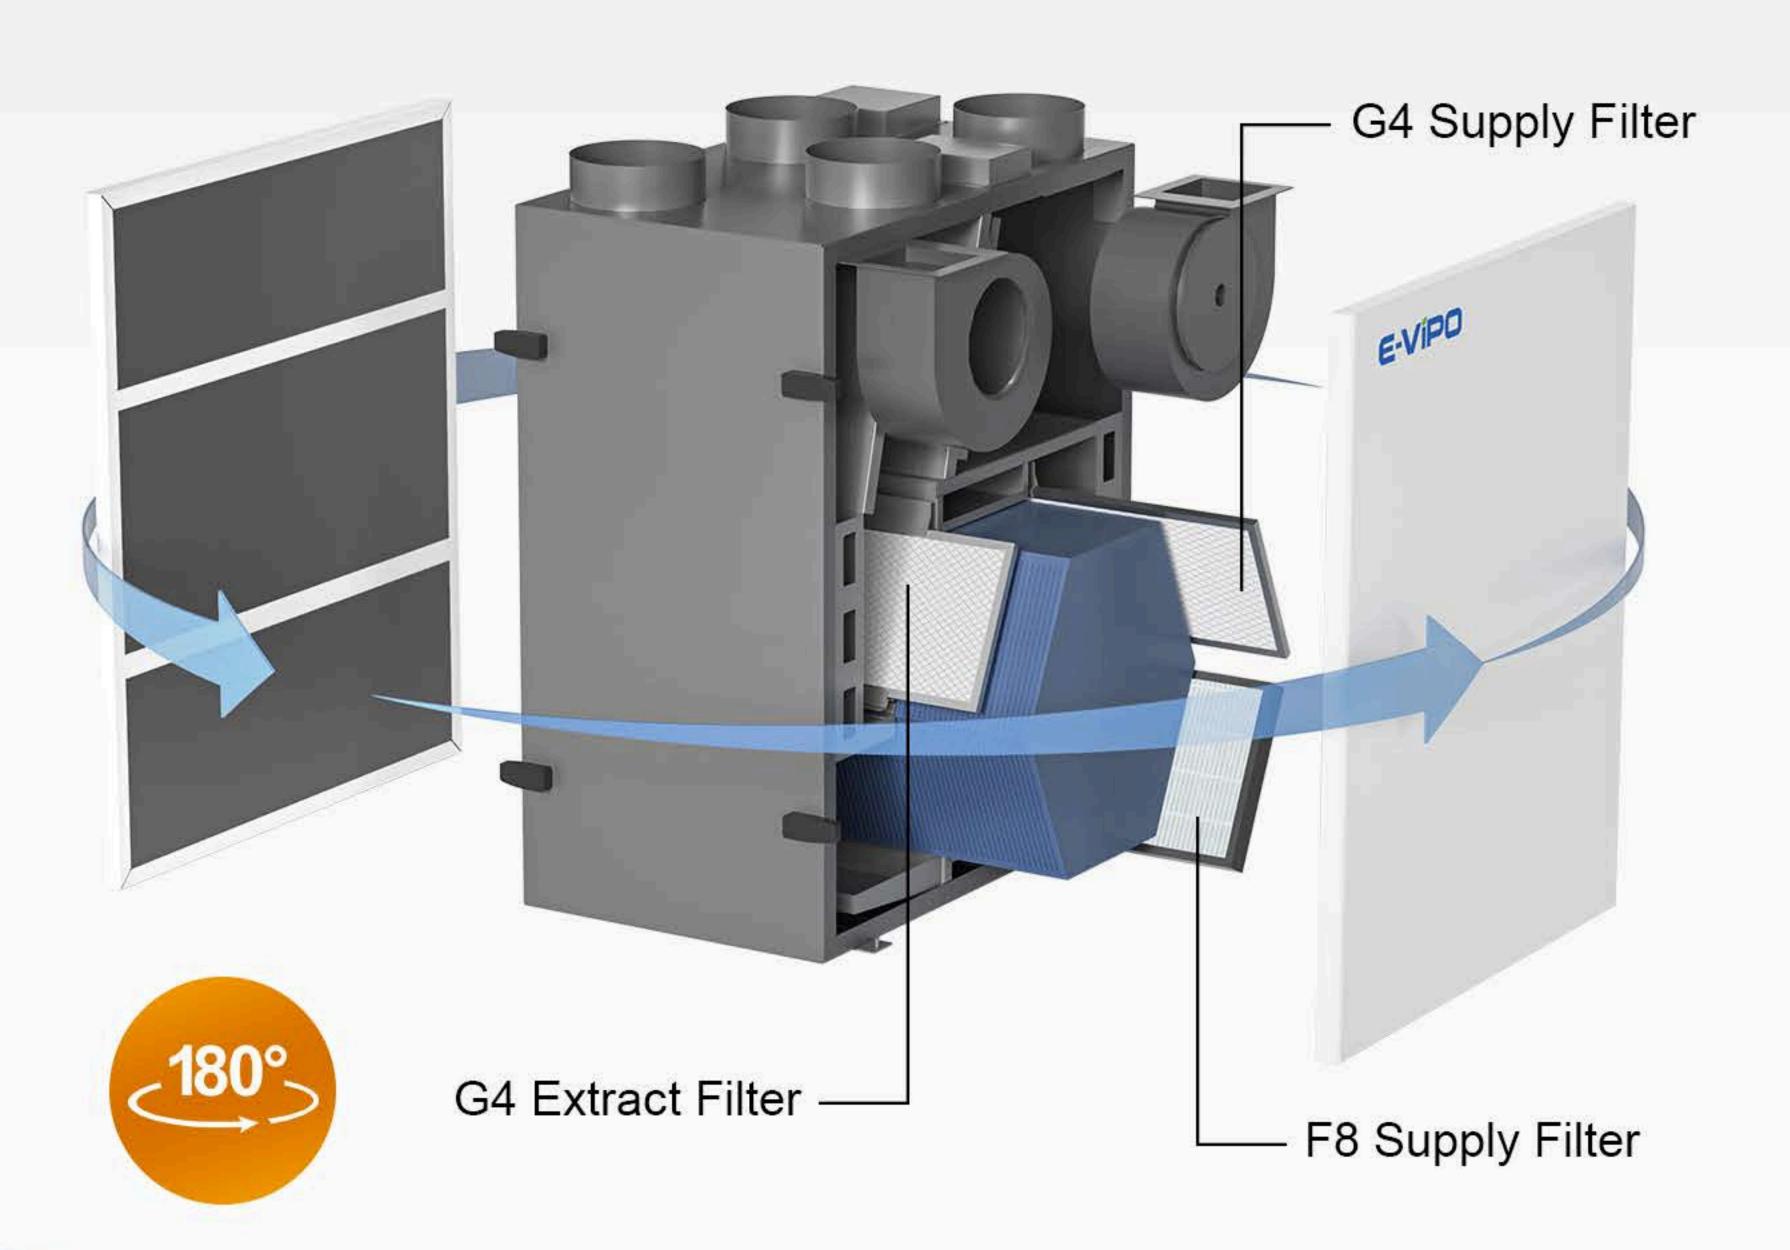



## BYPASS DAMPER INTEGRATION

Bulit-in Bypass damper for summer bypass, without exchanging the heat at the heat exchanger, the fresh air with comfortable temperature level from outdoor can be delivered into the room directly.

