



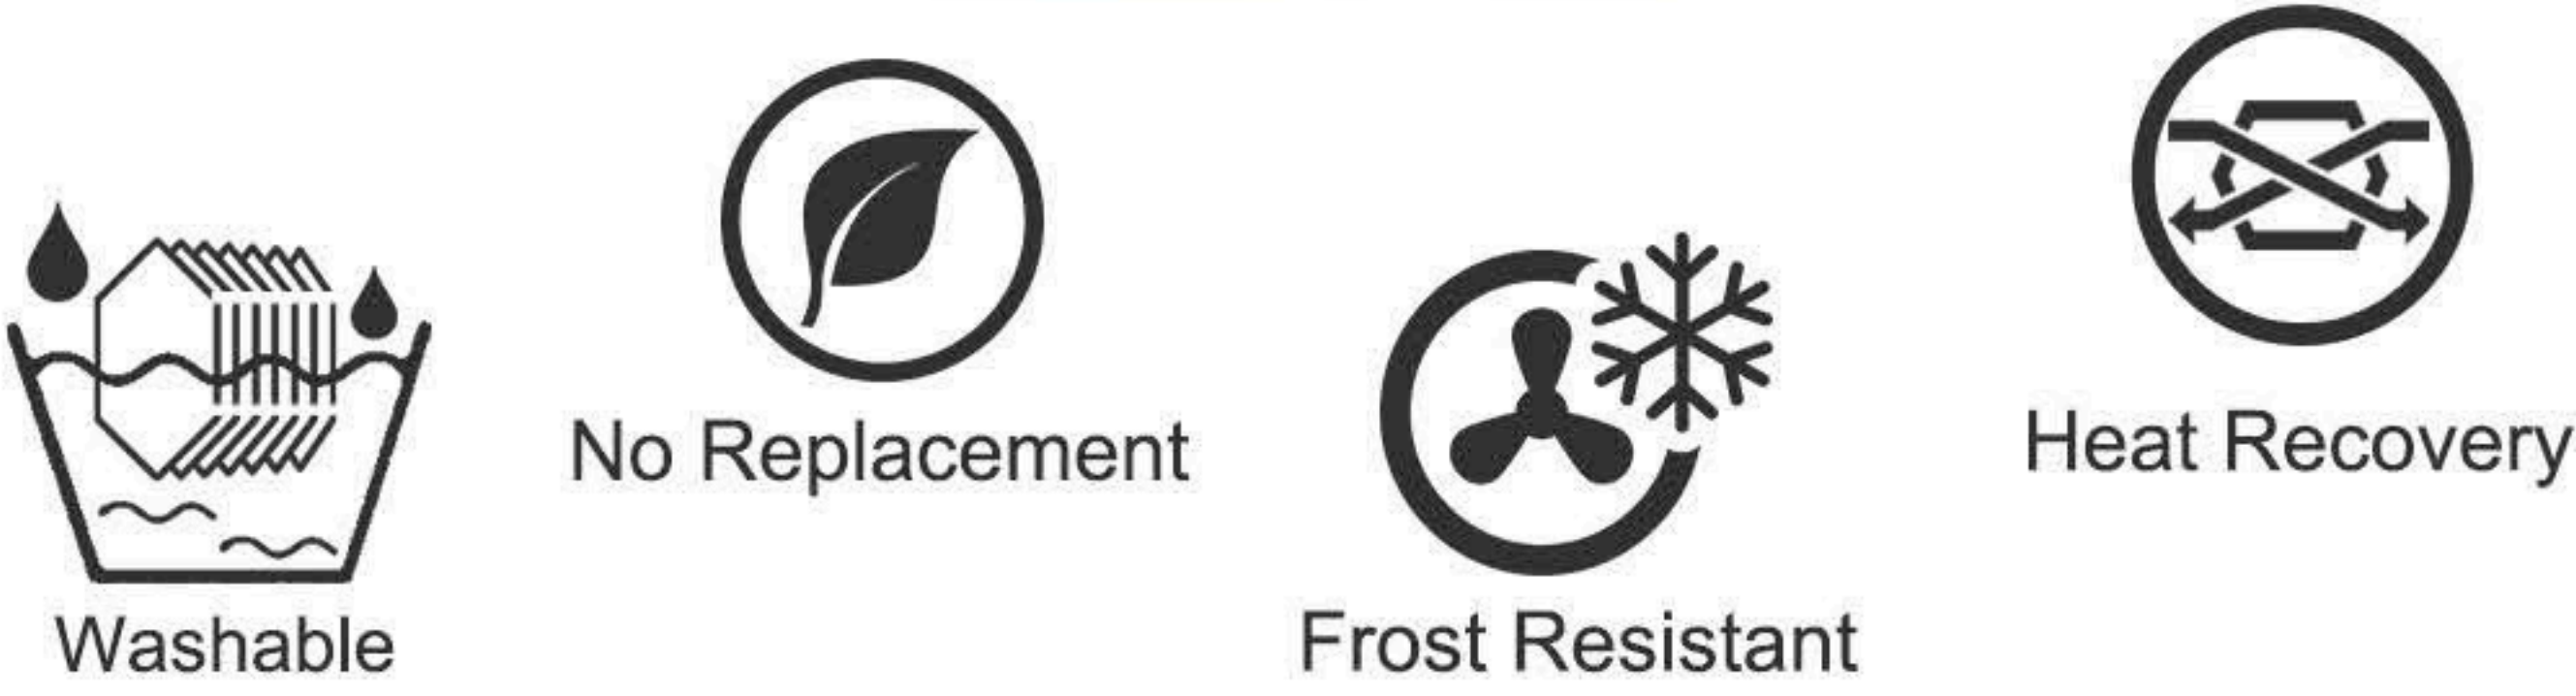


Model	Airflows (@100pa)	Heat Recovery Efficiency	Supply Filter	Extract Filter	Heat Exchanger	Motor Type	Voltage	Power	Air Duct Diameter	Product Size
CS600-ERV-B-Z-EC	600m³/h	81% ~ 92%	G4 (Standard) F8 (Optional)	G4	Counter-flow *3pcs	EC	200-240V ~ 50/60HZ	340W, 2.4A	Φ250mm	1240*1120*430mm
CS700-ERV-B-Z-EC	700m³/h	80% ~ 92%	G4 (Standard) F8 (Optional)	G4	Counter-flow *3pcs	EC	200-240V ~ 50/60HZ	425W, 3A	Φ250mm	1240*1120*430mm
CS800-ERV-B-Z-EC	800m³/h	78% ~ 92%	G4 (Standard) F8 (Optional)	G4	Counter-flow *3pcs	EC	200-240V ~ 50/60HZ	445W, 3.1A	Φ250mm	1240*1120*430mm
CS900-ERV-B-Z-EC	900m³/h	80% ~ 92%	G4 (Standard) F8 (Optional)	G4	Counter-flow *3pcs	EC	200-240V ~ 50/60HZ	395W, 2.5A	Φ315mm	1500*1410*430mm
CS1000-ERV-B-Z-EC	1000m³/h	79% ~ 92%	G4 (Standard) F8 (Optional)	G4	Counter-flow *3pcs	EC	200-240V ~ 50/60HZ	455W, 2.9A	Φ315mm	1500*1410*430mm
CS1200-ERV-B-Z-EC	1200m³/h	75% ~ 92%	G4 (Standard) F8 (Optional)	G4	Counter-flow *3pcs	EC	200-240V ~ 50/60HZ	535W, 3.3A	Φ315mm	1500*1410*430mm

92% HIGH EFFICIENCY
Enthalpy Counter-flow Heat Exchanger Core

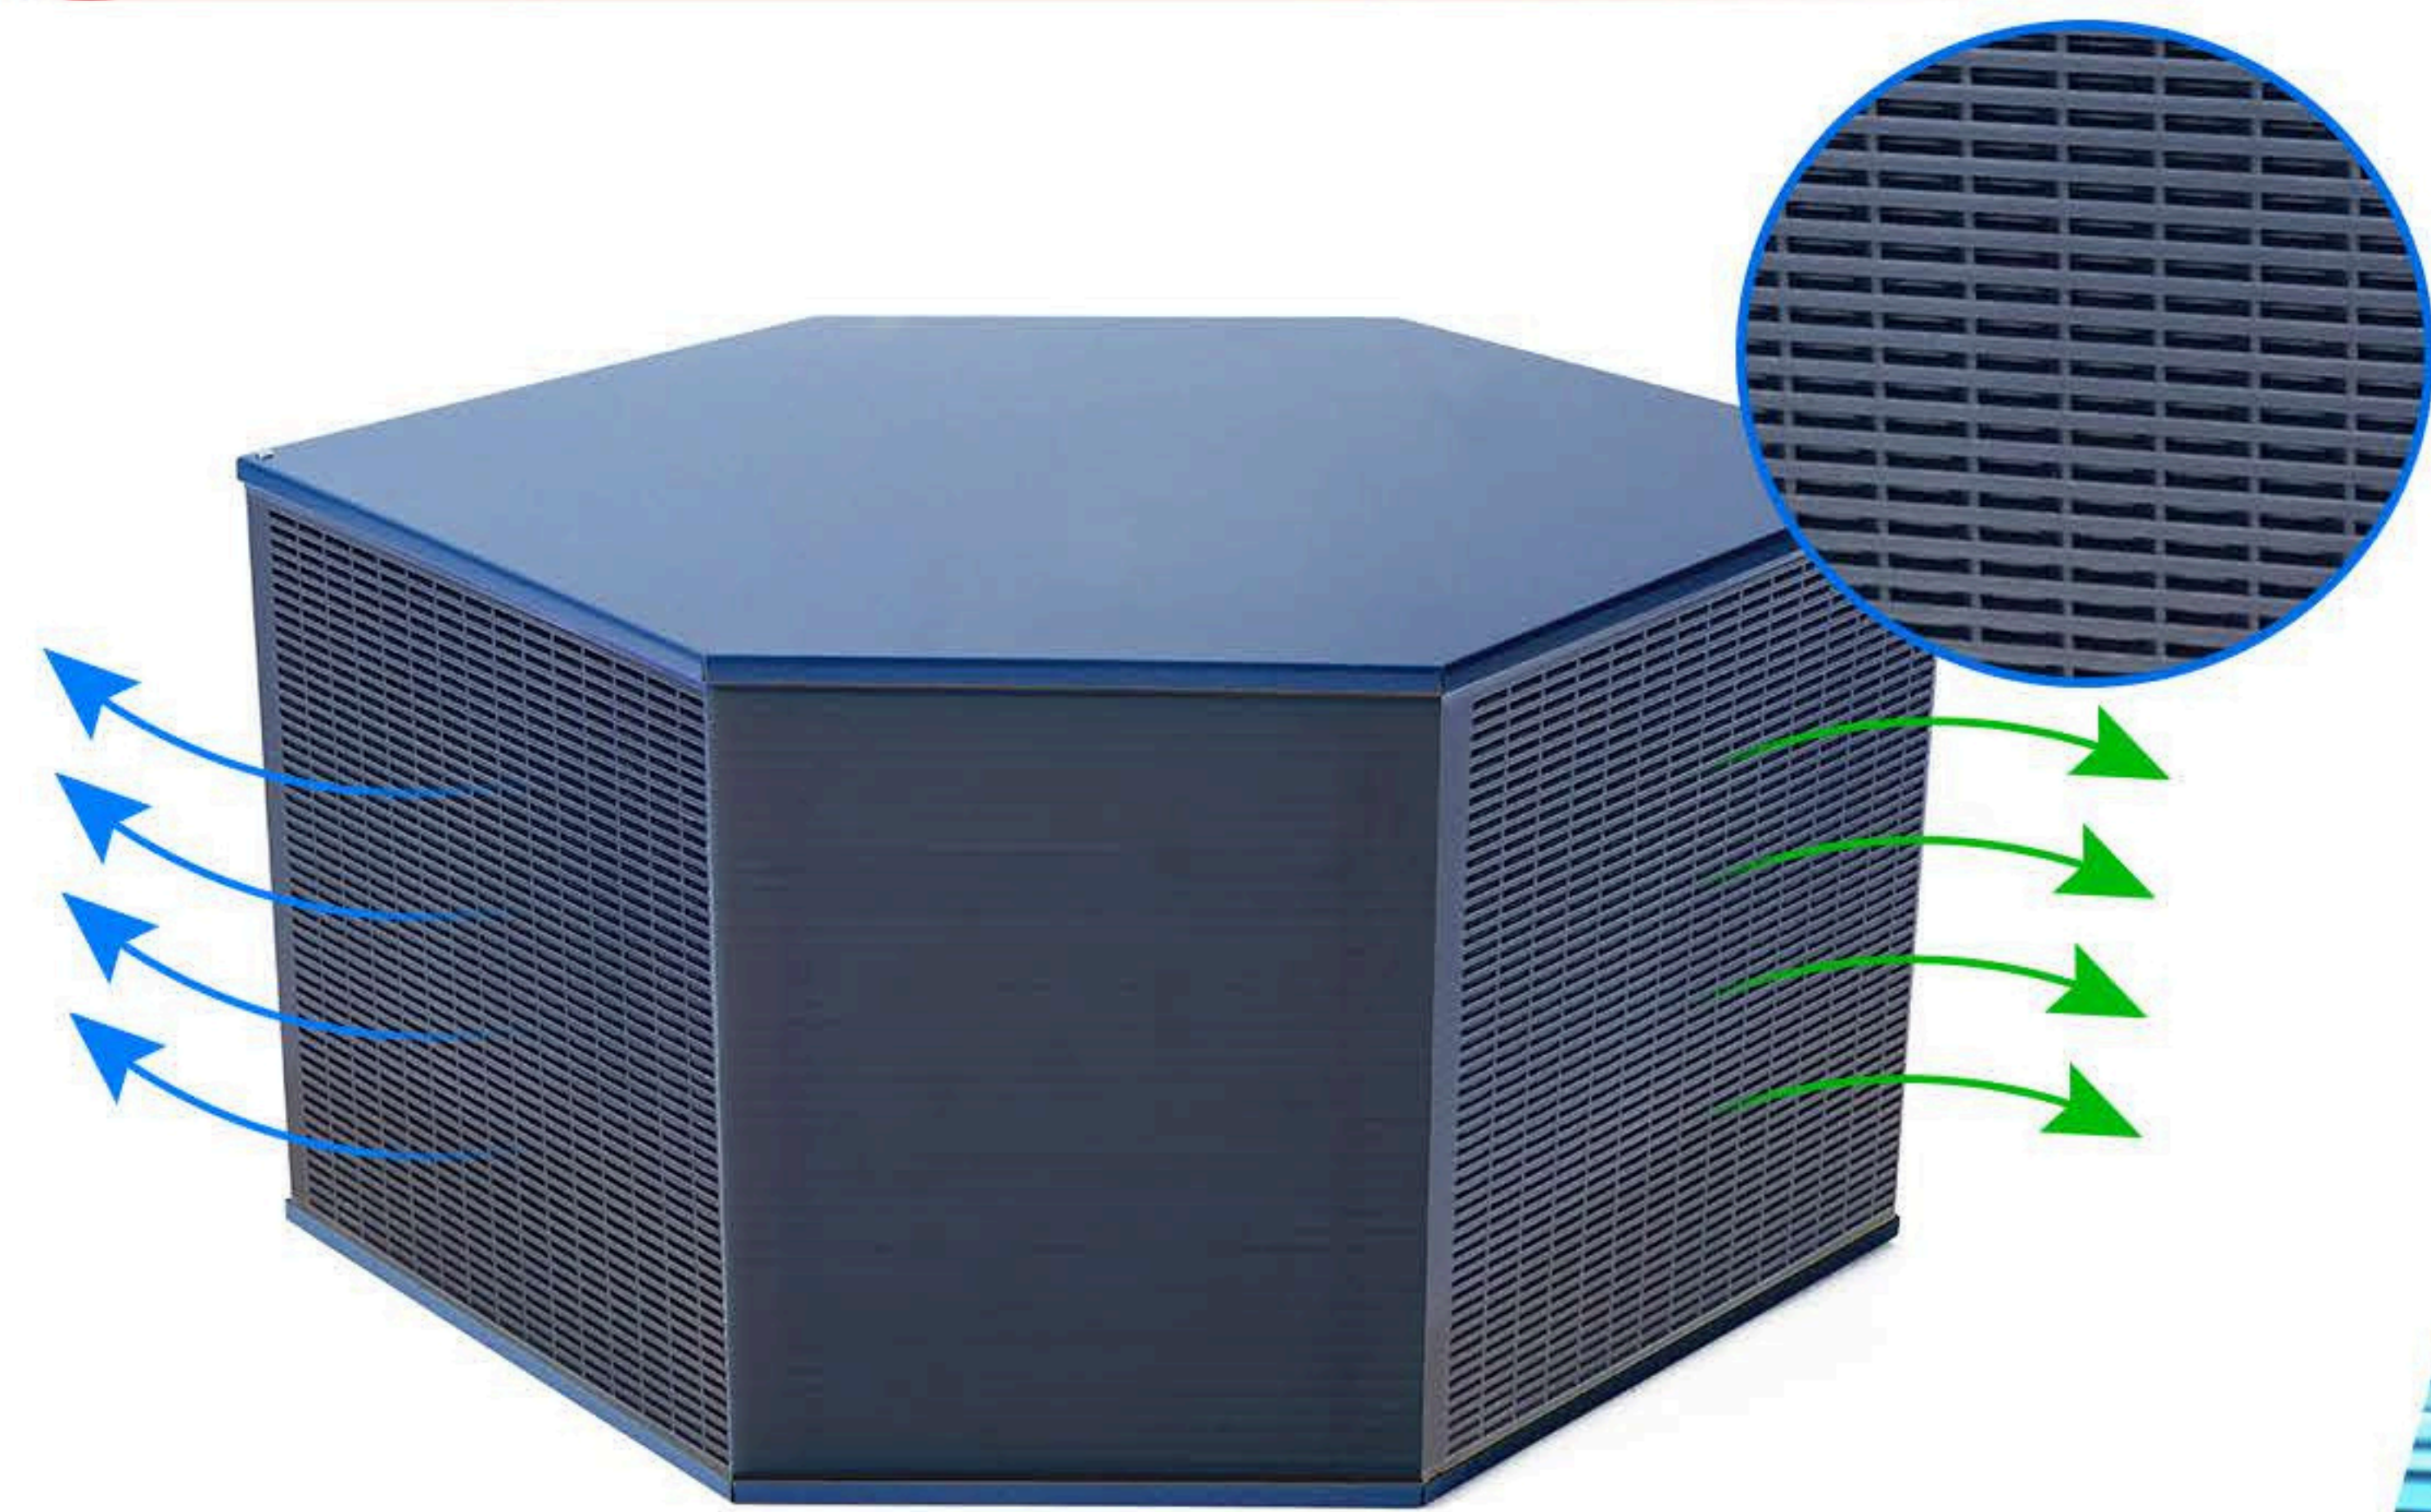

Integrated Bypass Air Channel

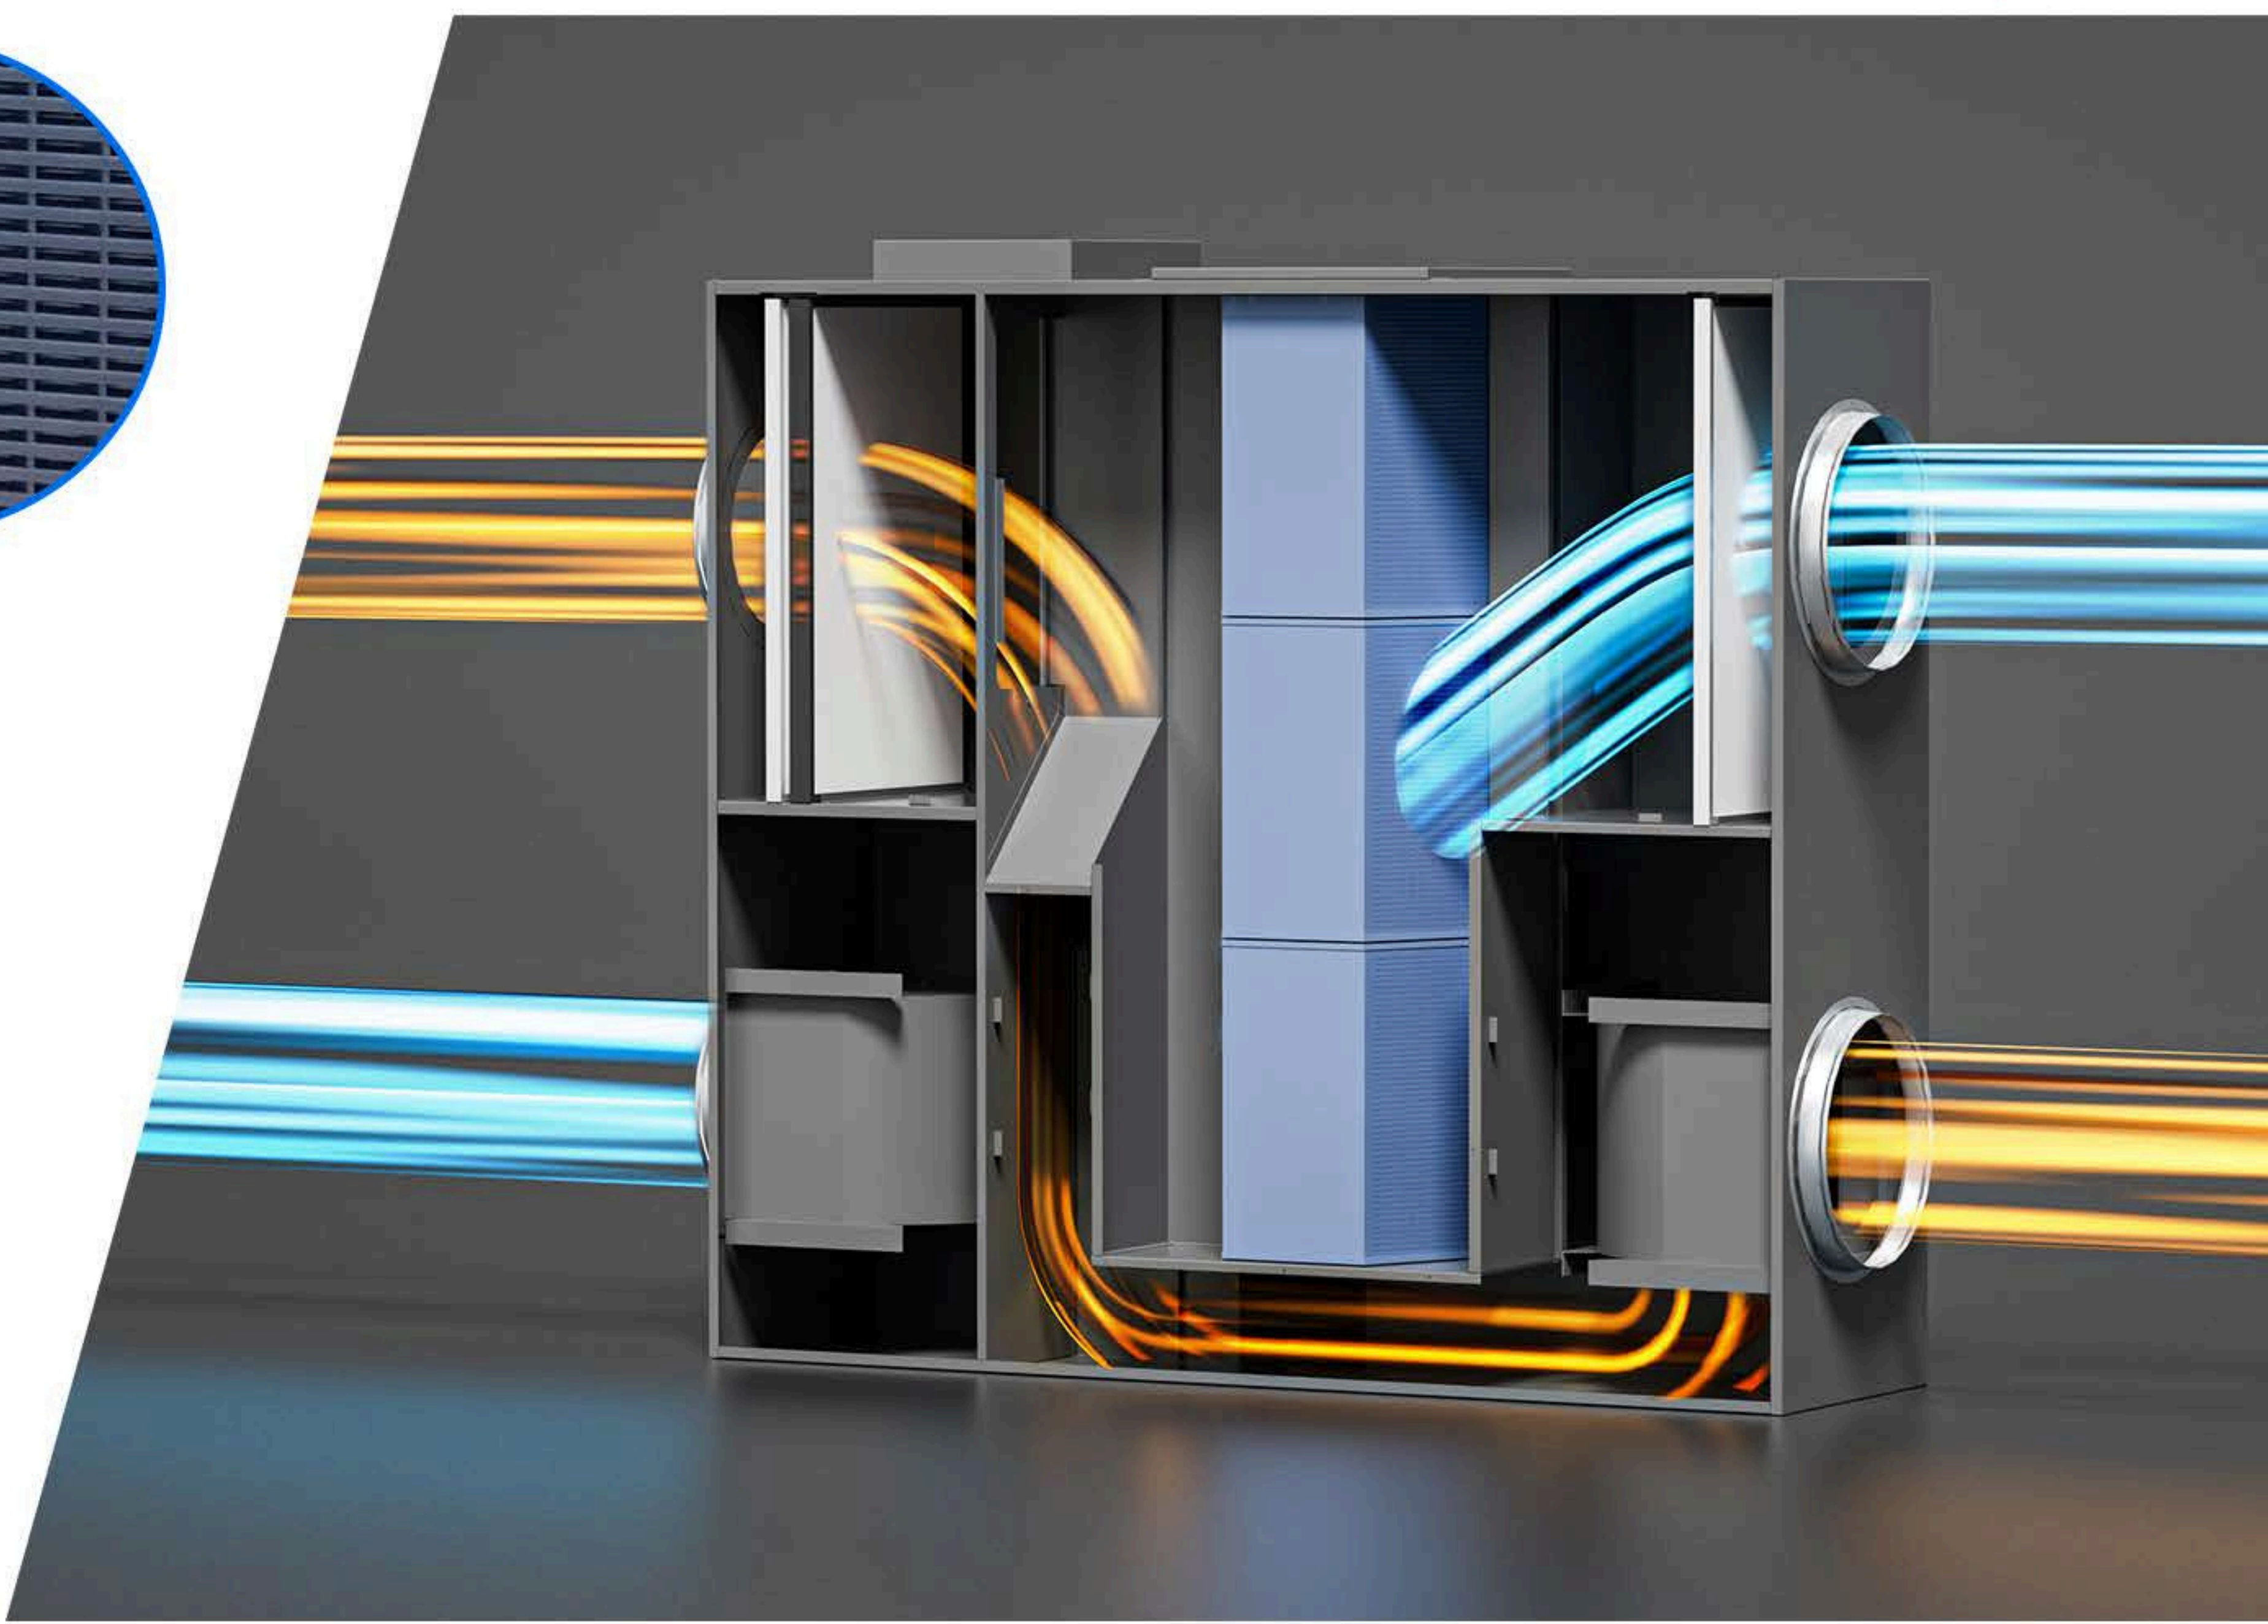

BOTTOM Service Panel

