

Constant Flow

HEAT

RECOVERY


VENTILATION

100m³/h - 180m³/h




Model	Airflows (@100pa)	Heat Recovery Efficiency	Supply Filter	Extract Filter	Heat Exchanger	Motor Type	Voltage	Power	Air Duct Diameter	Product Size
CS100-ERV-B-Z-EC	100m³/h	85% ~ 96%	G4 (Standard) F8 (Optional)	G4	Counter-flow	EC	200-240V ~ 50/60HZ	45W, 0.37A	Φ125mm	805*523*195mm
CS150-ERV-B-Z-EC	150m³/h	80% ~ 96%	G4 (Standard) F8 (Optional)	G4	Counter-flow	EC	200-240V ~ 50/60HZ	76W, 0.55A	Φ125mm	805*523*195mm
CS180-ERV-B-Z-EC	180m³/h	77% ~ 96%	G4 (Standard) F8 (Optional)	G4	Counter-flow	EC	200-240V ~ 50/60HZ	107W, 0.75A	Φ125mm	805*523*195mm

INTEGRATED BYPASS

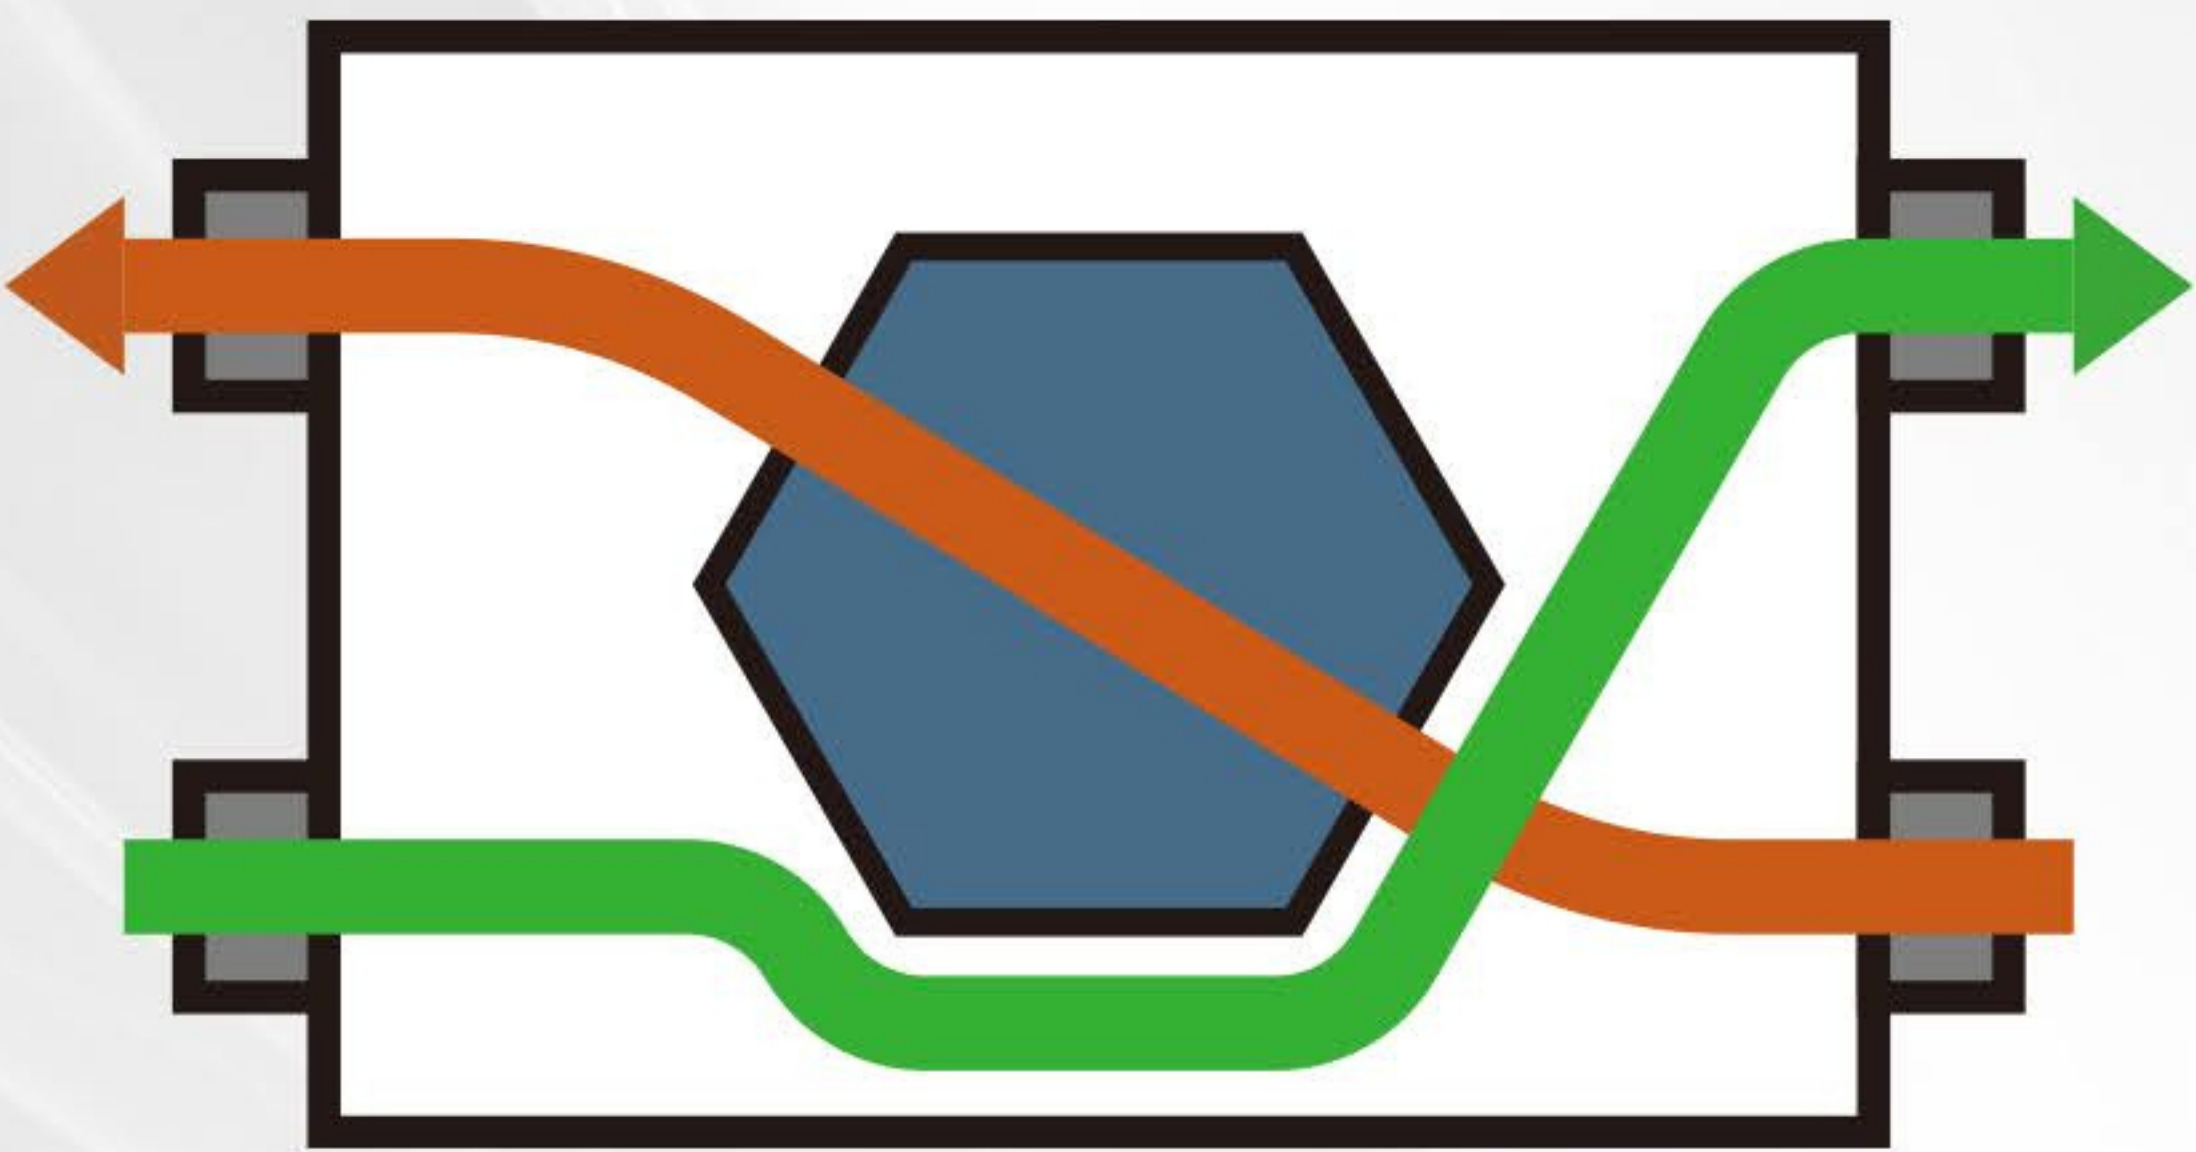

SERVICE PANEL ON BOTH SIDES

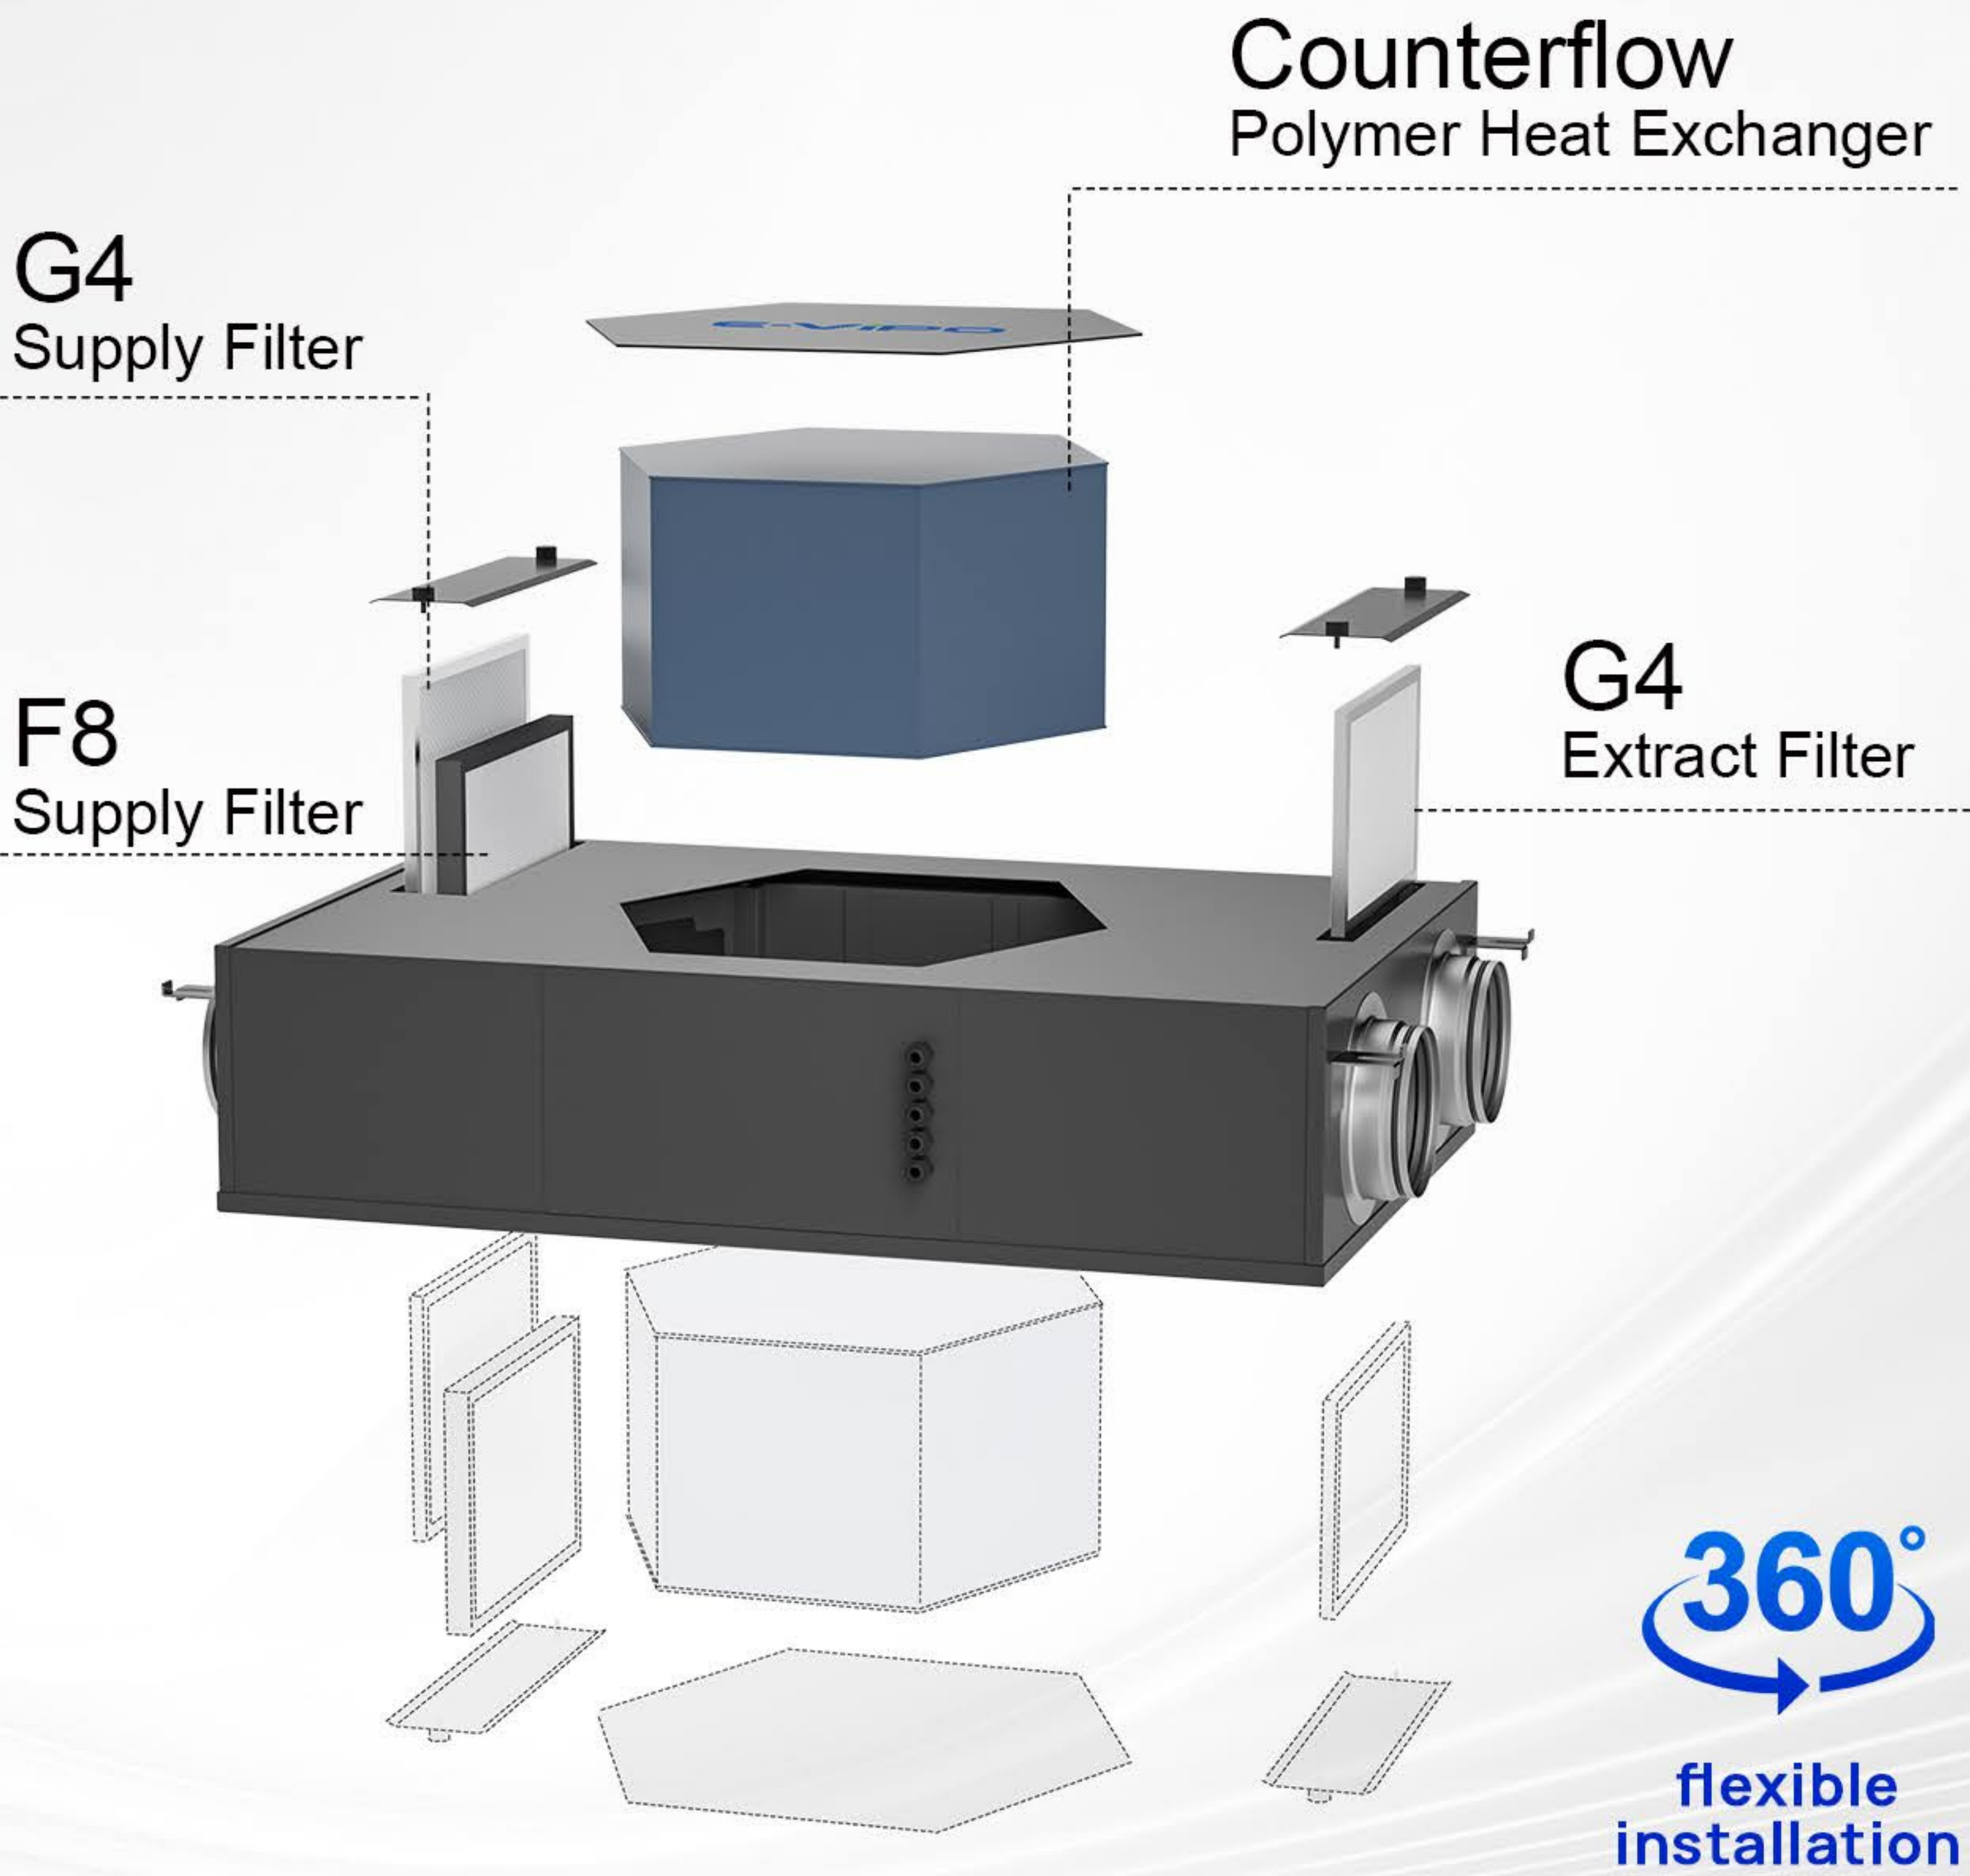

Multiple Temperature Sensors on the Unit

Based on Real-time Indoor and Outdoor TEMP Sensors

Intake outdoor comfortable fresh Airdelivered into rooms directly

CONSTANT FLOW

Constant Flow EC Motors have the features of high performance, energy saving, ultra-quiet and high static pressure. The advanced EC motors ensure sufficient air delivering to each room and a constant circulation of air for apartments.

