

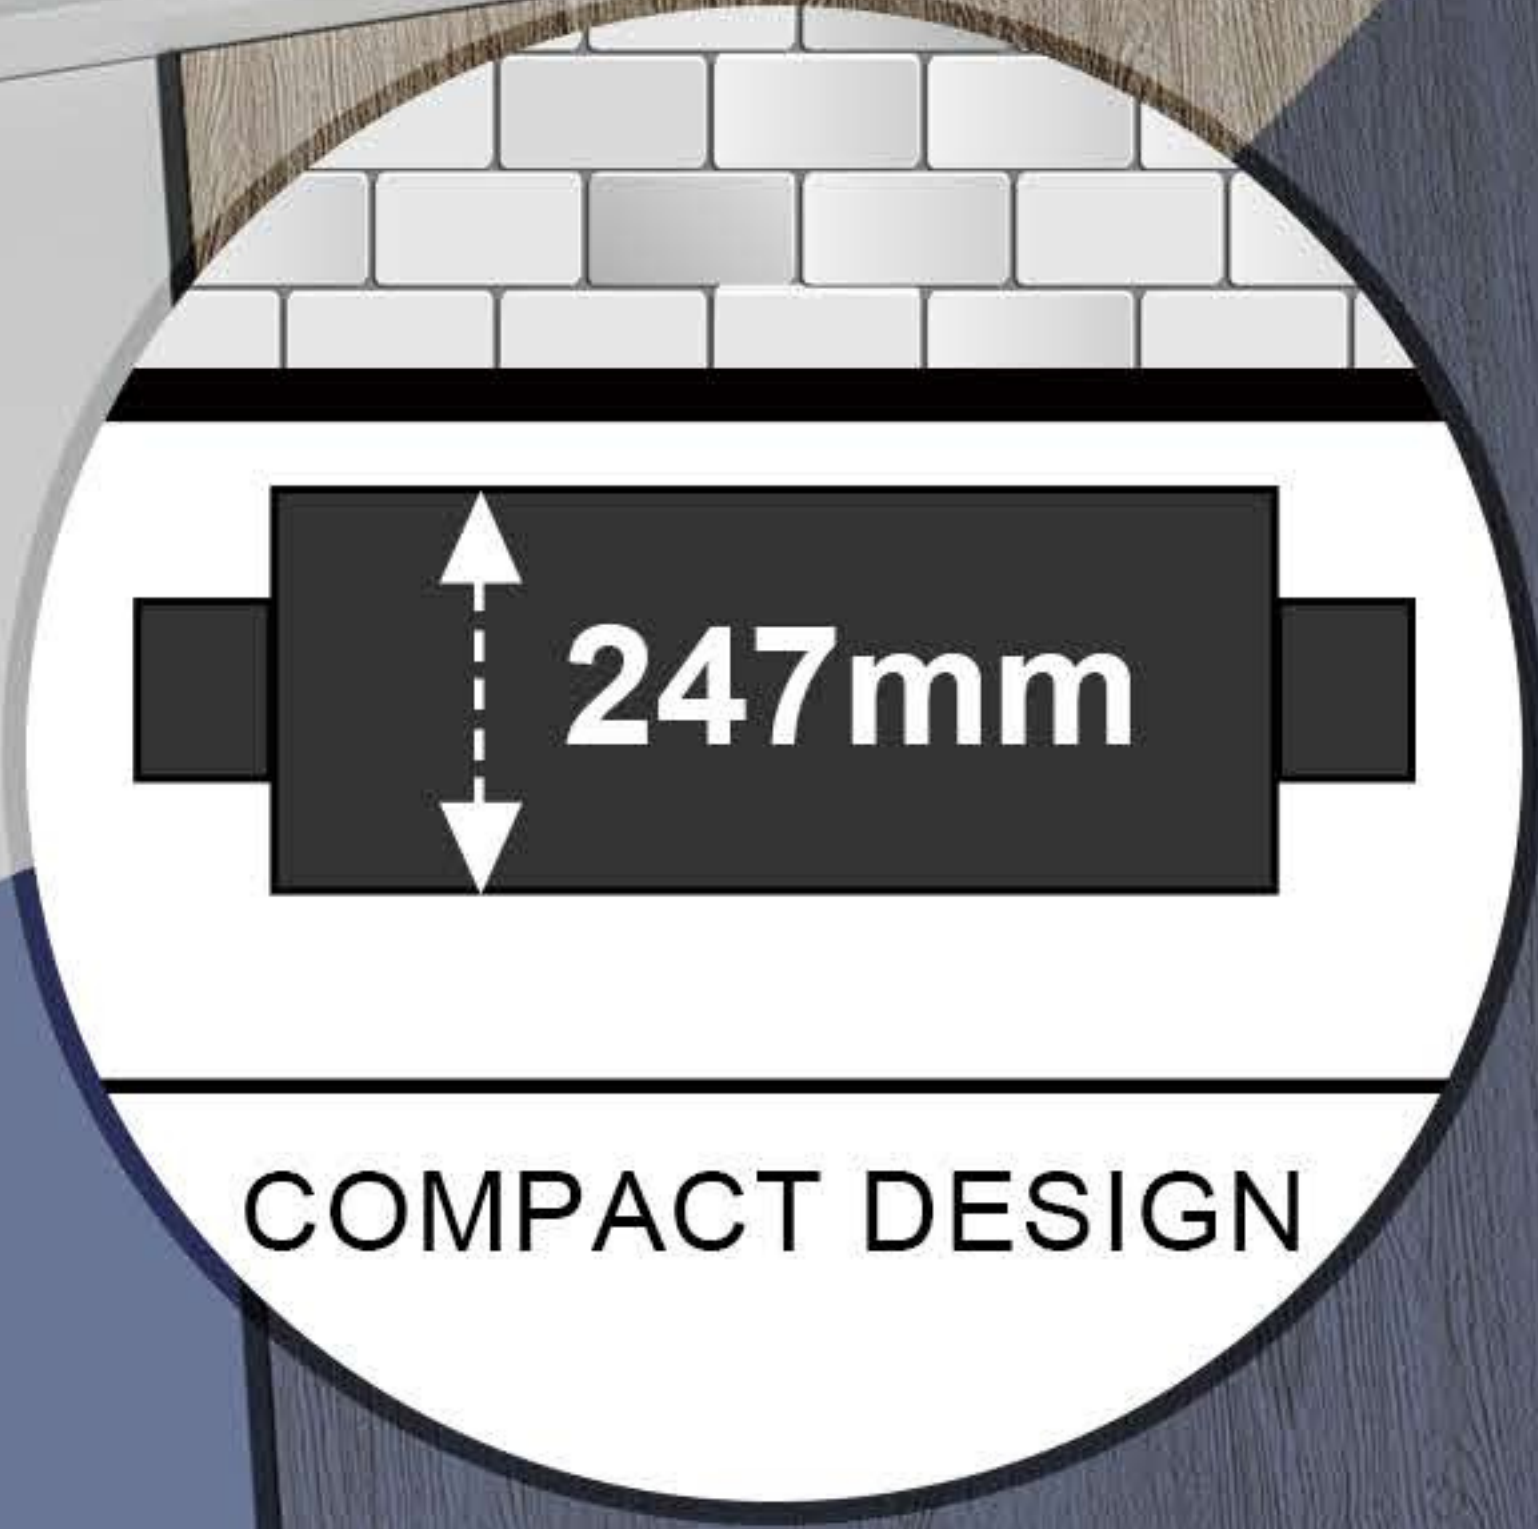
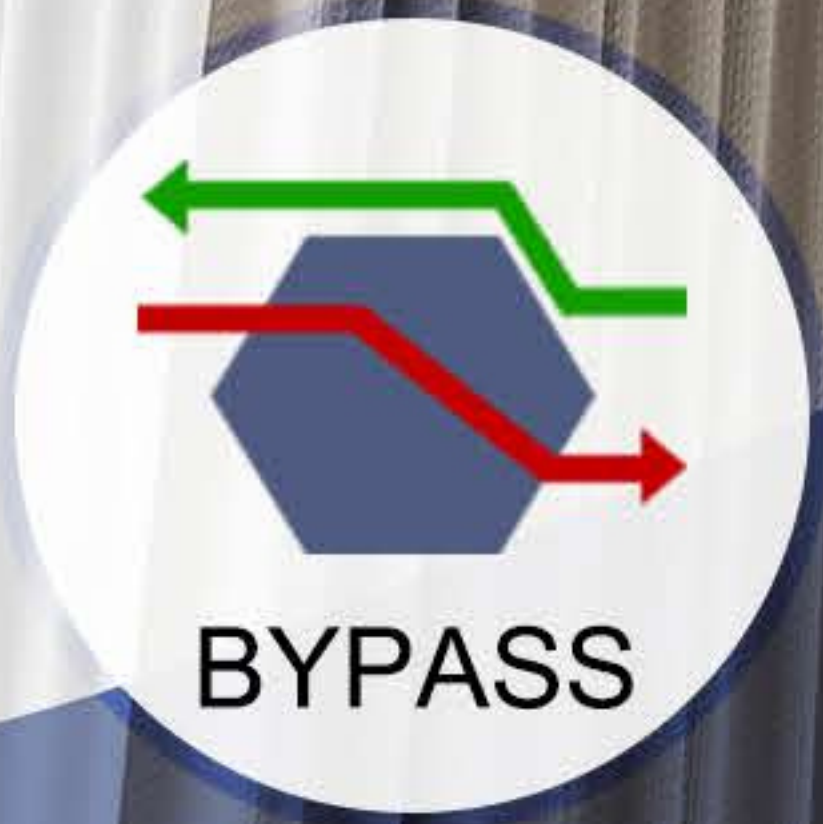


200m³/h - 300m³/h

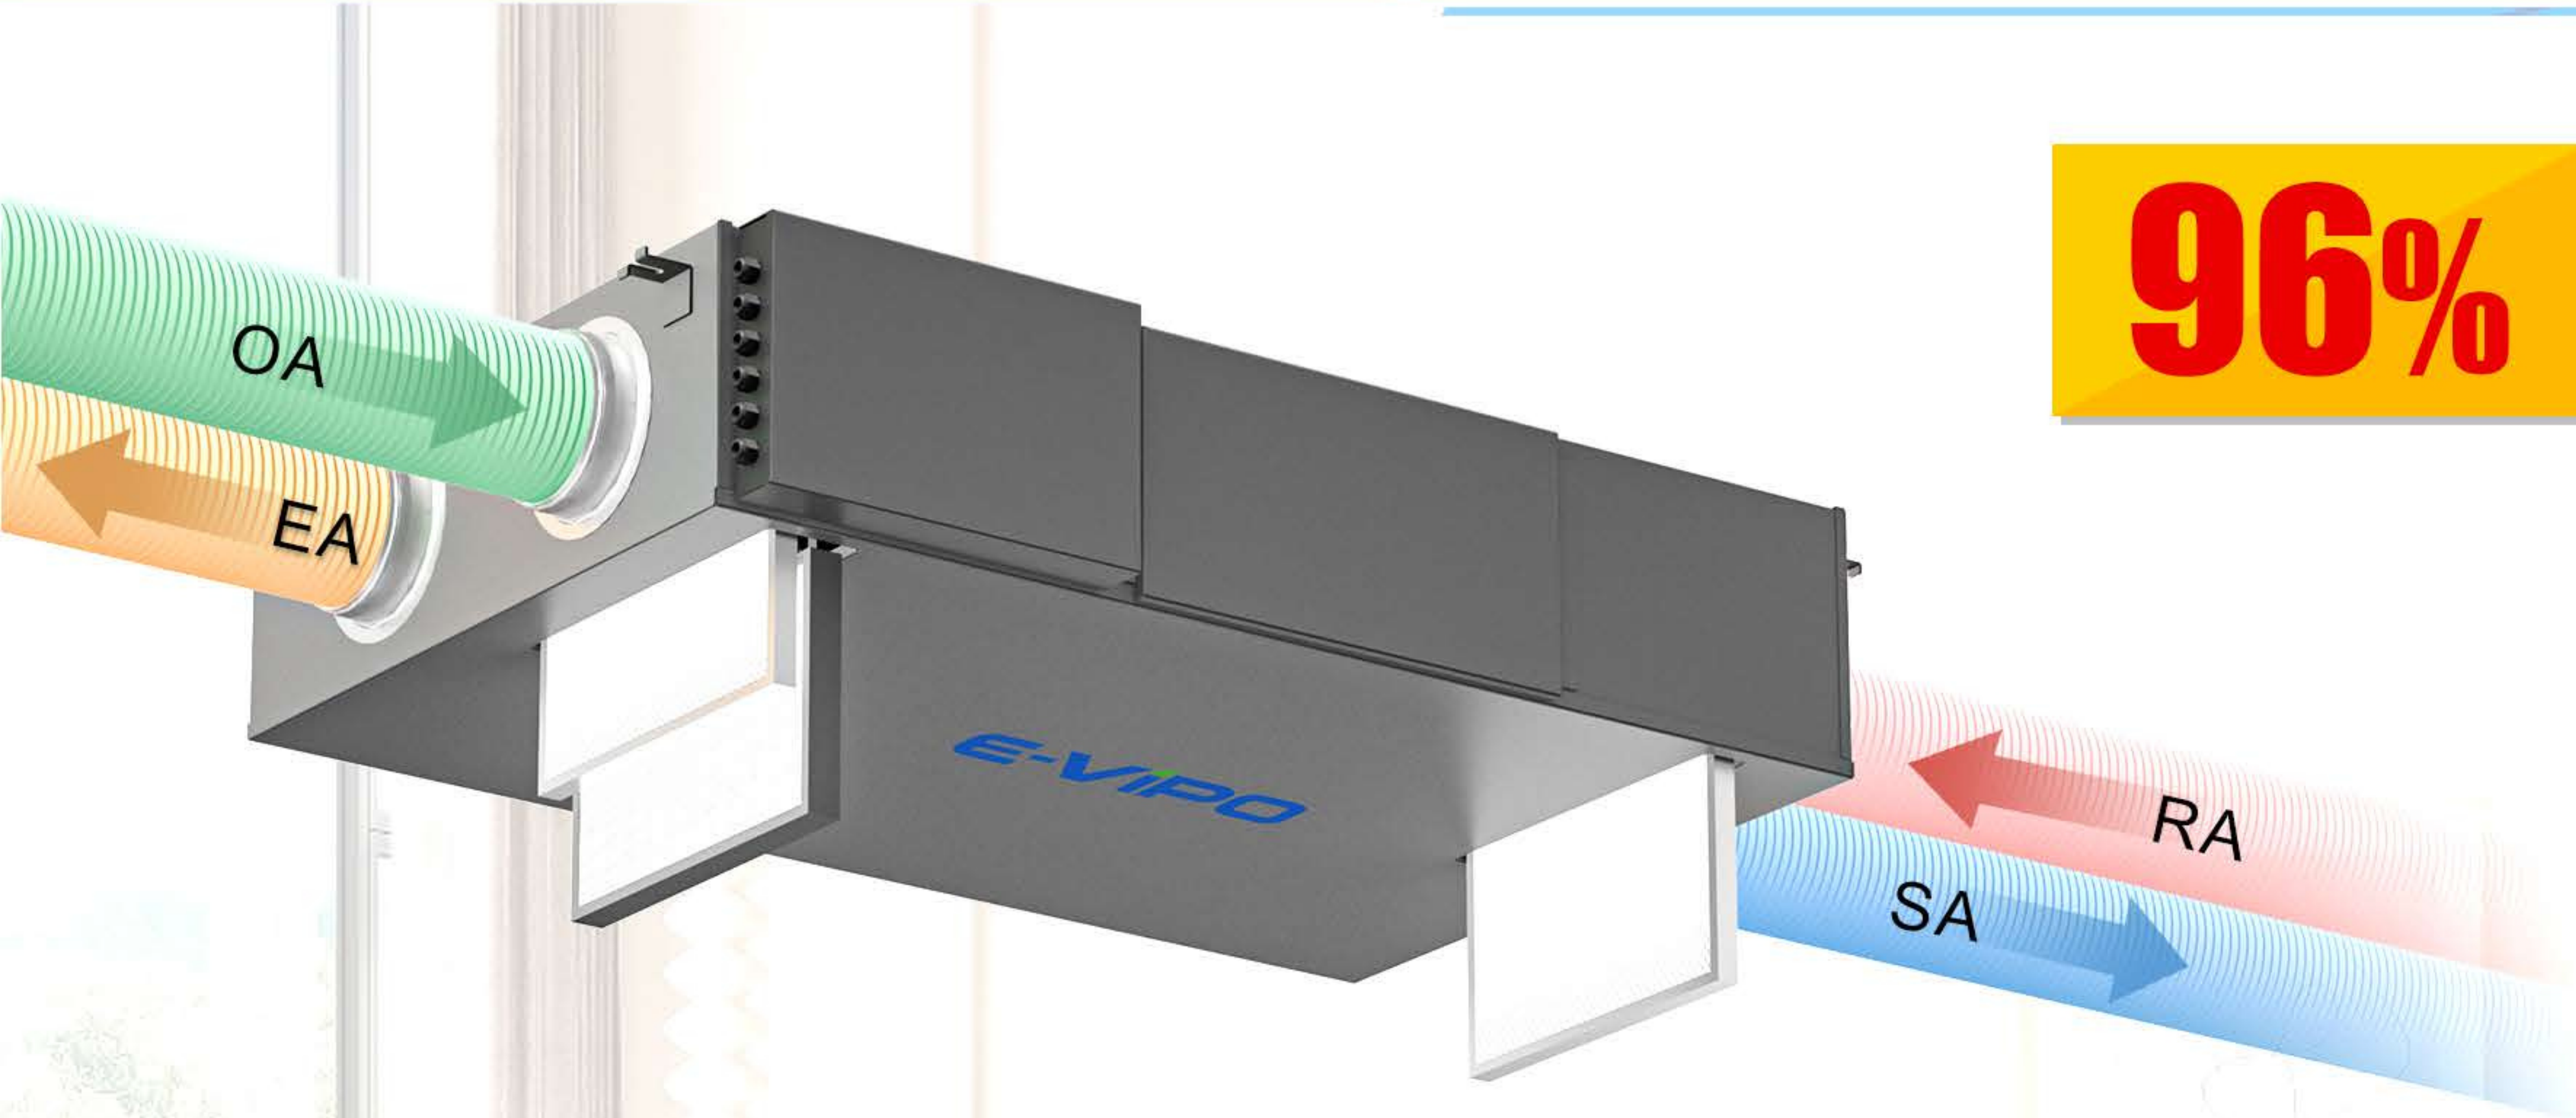

Model	Airflows (@100pa)	Heat Recovery Efficiency	Supply Filter	Extract Filter	Heat Exchanger	Motor Type	Power	Air Duct Diameter	Product Size
CS200-ERV-B-Z-EC	200m³/h	90% ~ 96%	G4 (Standard) F8 (Optional)	G4	Counter-flow * 2	EC	73W, 0.6A	Φ150mm	1224*747*247mm
CS250-ERV-B-Z-EC	250m³/h	87% ~ 96%	G4 (Standard) F8 (Optional)	G4	Counter-flow * 2	EC	102W, 0.7A	Φ150mm	1224*747*247mm
CS300-ERV-B-Z-EC	300m³/h	84% ~ 96%	G4 (Standard) F8 (Optional)	G4	Counter-flow * 2	EC	142W,1A	Φ150mm	1224*747*247mm

- High Static Pressure EC (BLDC) Motor
- EU1253/2014 ErP EcoDesign Compliant
- Internal Temperature / Humidity Sensors
- Summer Bypass Integration
- Low Energy Consumption
- Ultra Silent Operation

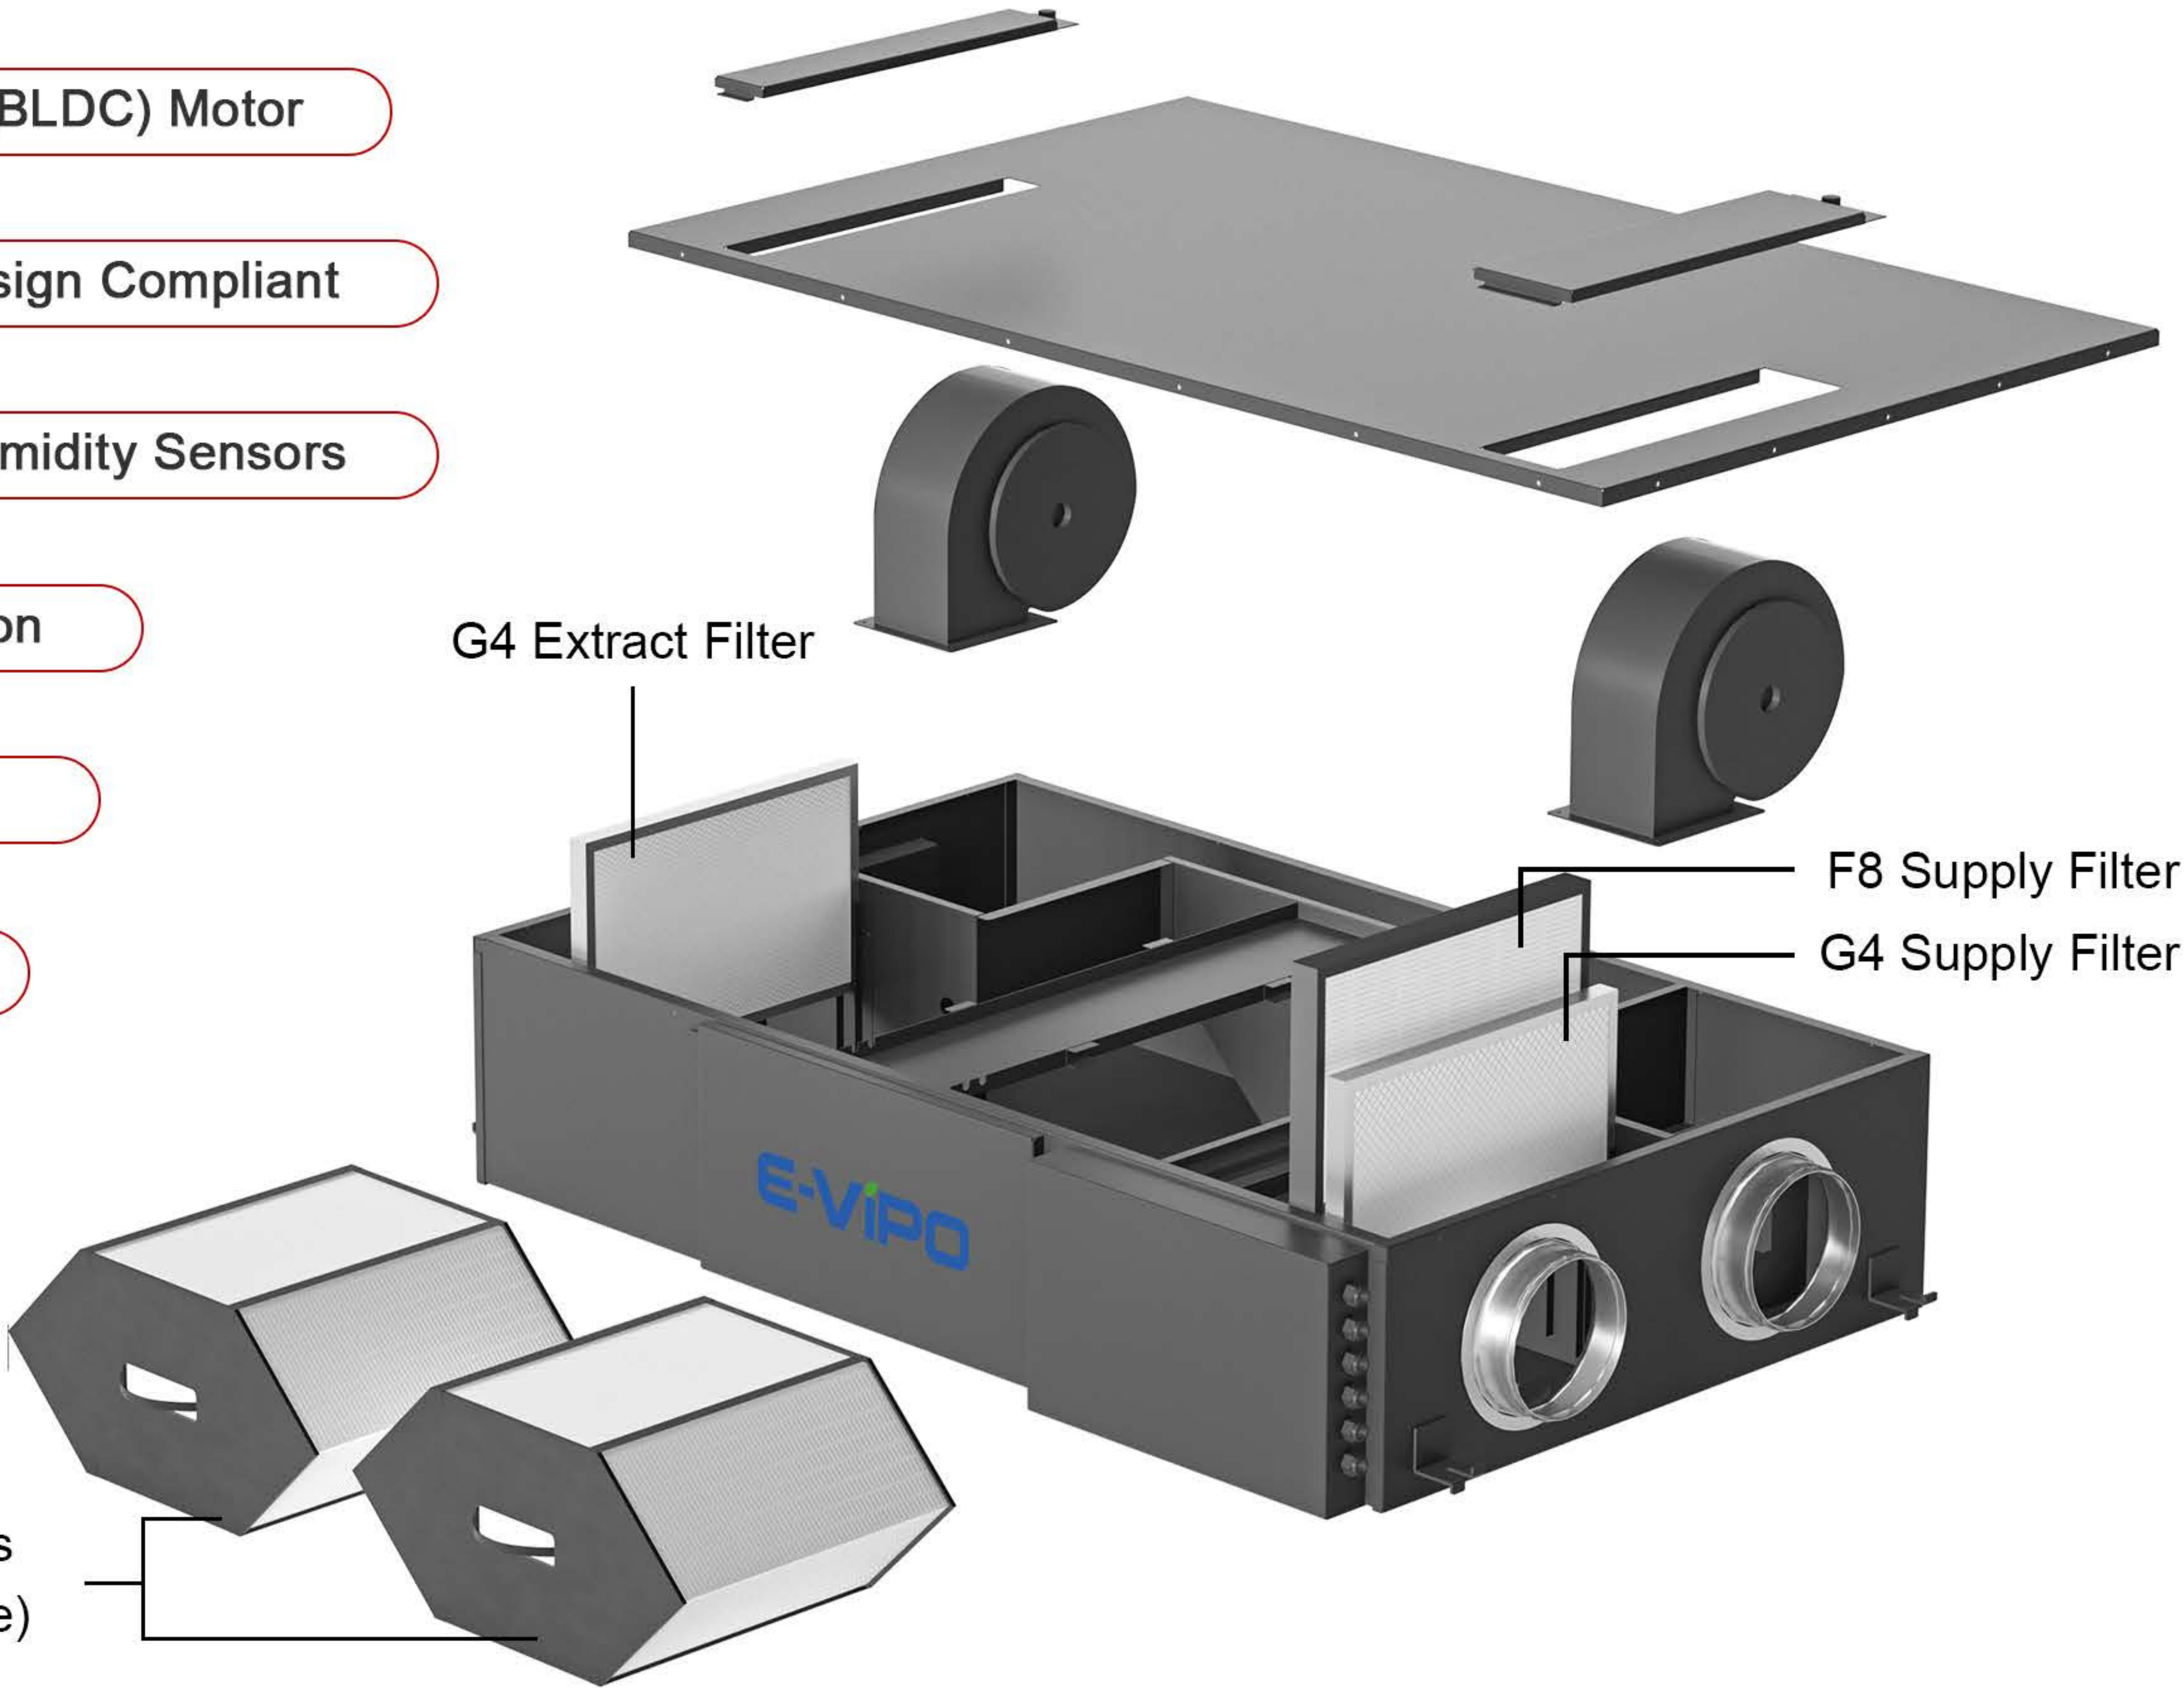

Bottom Service Panel
Easy Filter Maintaining

